

FITTING INSTRUCTIONS

RESTRICTOR IPA NO. 21214

EXAMPLE WOOD PROFILE

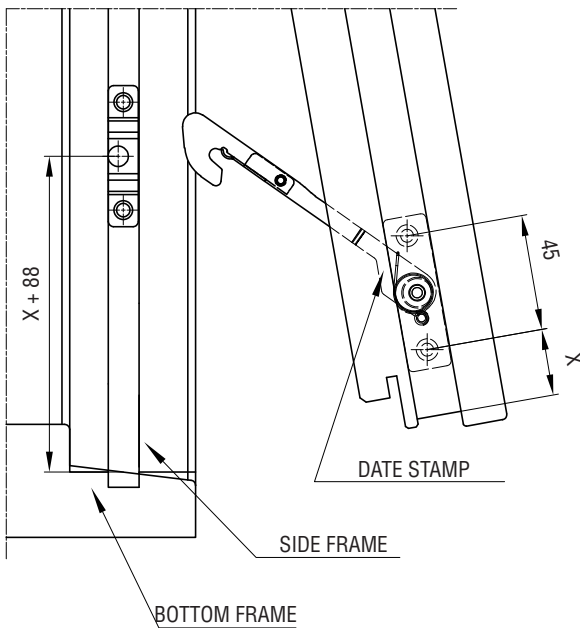


FIG. 1
RIGHT HAND ILLUSTRATION

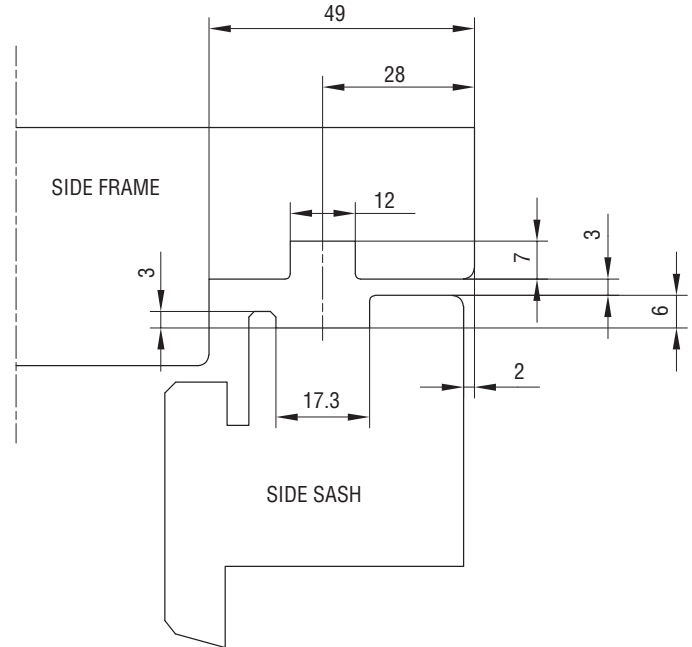


FIG. 2

IPA NO. 21214 IS USED FOR TOP HUNG AND CANOPY WINDOWS.

THE RESTRICTOR IS MOUNTED IN THE CHANNELS AT THE BOTTOM SIDE SASH AND SIDE FRAME.

X-DIMENSION IS OPTIONAL. MINIMUM X-DIMENSION IS APPROX. 13.5 MM. BY USING LARGER X-DIMENSION THE VENTILATION OPENING WILL BE EXTENDED.

OPERATING INSTRUCTIONS:

1. OPEN THE SASH UNTIL THE RESTRICTOR CATCH ENGAGES.
2. PULL THE SASH IN APPROX. 20 MM.
3. LIFT/MOVE THE RESTRICTOR ARM IN THE DIRECTION OF THE ARROW AND OPEN THE SASH.
4. WHEN THE WINDOW IS CLOSED THE RESTRICTOR RE-ENGAGES AUTOMATICALLY.

USE SCREW NO. 3.5/4.0

MAINTENANCE:

THE FITTINGS MUST NOT BE PAINTED.

TEST THE OPERATION AND LUBRICATE THE PIVOT (CENTRE OF ROTATION) FROM TIME TO TIME BUT AT LEAST ONCE A YEAR. SEE ALSO IPA BESLAG.DK.