

FITTING INSTRUCTIONS

RESTRICTOR IPA NO. 21215

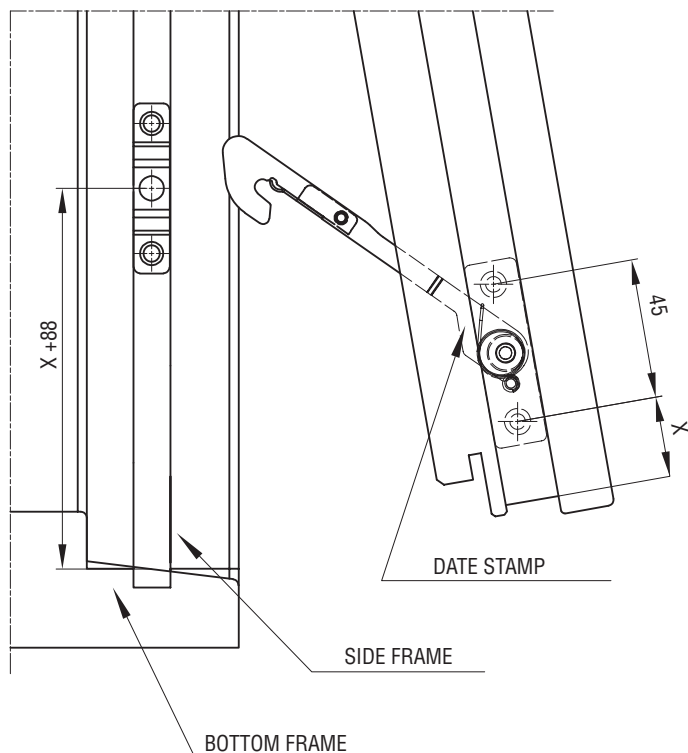


FIG. 1
RIGHT HAND ILLUSTRATION

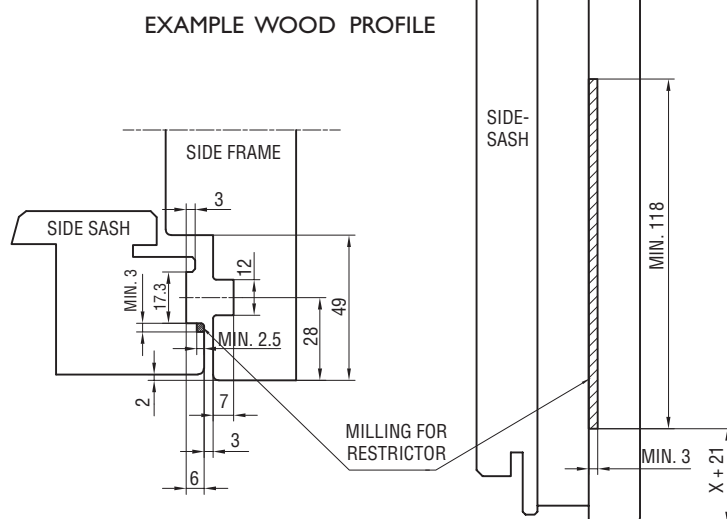


FIG. 2

IPA NO. 21215 IS USED FOR TOP HUNG AND CANOPY WINDOWS.

THE RESTRICTOR IS MOUNTED IN THE CHANNELS AT THE BOTTOM SIDE SASH AND SIDE FRAME.

NOTE! THIS RESTRICTOR DEMANDS SPECIAL MILLING IN THE SIDE SASH, DUE TO A SPECIAL RESTRICTOR CATCH.

X-DIMENSION IS OPTIONAL. MINIMUM X-DIMENSION IS APPROX. 13.5 MM. BY USING LARGER X-DIMENSION THE VENTILATION OPENING WILL BE EXTENDED.

OPERATING INSTRUCTIONS:

1. OPEN THE SASH UNTIL THE RESTRICTOR CATCH ENGAGES.
2. PULL THE SASH IN APPROX. 20 MM.
3. LIFT/MOVE THE RESTRICTOR ARM IN THE DIRECTION OF THE ARROW AND OPEN THE SASH.
4. WHEN THE WINDOW IS CLOSED THE RESTRICTOR RE-ENGAGES AUTOMATICALLY.

USE SCREW NO. 3.5/4.0

MAINTENANCE:

THE FITTINGS MUST NOT BE PAINTED.

TEST THE OPERATION AND LUBRICATE THE PIVOT (CENTRE OF ROTATION) FROM TIME TO TIME BUT AT LEAST ONCE A YEAR.

SEE ALSO IPA BESLAG.DK